

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. 3068S or 4068SS).

Commercial Outswing Entry Door Dimensions and Specifications


Door Number	Number of Panels Open*	Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Glass Area Sq. Ft./ (m ²)	Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)		
		Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)					
ACD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.45 (1.81)	33 1/8" (841)	35 1/16" (891)	79 1/8" (2029)	10.60 (0.98)	19.45 (1.81)	21.46 (1.99)
ACD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.78 (2.12)	39 1/8" (994)	41 1/16" (1043)	79 1/8" (2029)	13.15 (1.22)	22.78 (2.12)	24.88 (2.31)
ACD3868	1	45 15/16" (1167)	82" (2083)	46 7/16" (1180)	82 1/2" (2180)	24.02 (2.23)	41 3/8" (1051)	43 3/16" (1100)	79 1/8" (2029)	14.11 (1.31)	24.02 (2.23)	26.16 (2.43)
ACD3070	1	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	20.26 (1.88)	33 1/8" (841)	35 1/16" (891)	83 3/16" (2113)	11.17 (1.04)	20.26 (1.88)	22.33 (2.07)
ACD3670	1	43 11/16" (1110)	85 5/16" (2167)	44 3/16" (1122)	85 13/16" (2180)	23.72 (2.20)	39 1/8" (994)	41 1/16" (1043)	83 3/16" (2113)	13.86 (1.29)	23.72 (2.20)	25.88 (2.40)
ACD3870	1	45 15/16" (1167)	85 5/16" (2167)	46 7/16" (1180)	85 13/16" (2426)	25.02 (2.32)	41 3/8" (1051)	43 3/16" (1100)	83 3/16" (2113)	14.87 (1.38)	25.02 (2.32)	27.22 (2.53)
ACD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.61 (2.10)	33 1/8" (841)	35 1/16" (891)	92 1/8" (2359)	12.84 (1.19)	22.61 (2.10)	24.86 (2.31)
ACD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.48 (2.46)	39 1/8" (994)	41 1/16" (1043)	92 1/8" (2359)	15.94 (1.48)	26.48 (2.46)	28.82 (2.68)
ACD3880	1	45 15/16" (1167)	95" (2413)	46 7/16" (1180)	95 1/2" (2096)	27.94 (2.60)	41 3/8" (1051)	43 3/16" (1100)	92 1/8" (2359)	17.10 (1.59)	27.94 (2.60)	30.31 (2.82)
ACD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.69 (2.48)	44 3/16" (1122)	48 1/8" (1222)	79 1/8" (2029)	12.46 (1.16)	26.69 (2.48)	28.90 (2.68)
ACD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.76 (1.19)	21" (533)	23" (584)	79 1/8" (2029)	12.46 (1.16)	12.76 (1.19)	28.90 (2.68)
ACD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.35 (3.10)	56 3/16" (1427)	60 1/8" (1527)	79 1/8" (2029)	16.08 (1.49)	33.35 (3.10)	35.73 (3.32)
ACD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	16.09 (1.49)	27" (686)	29" (737)	79 1/8" (2029)	16.08 (1.49)	16.09 (1.49)	35.73 (3.32)
ACD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.57 (3.30)	60 3/16" (1529)	64 1/8" (1629)	79 1/8" (2029)	17.79 (1.65)	35.57 (3.30)	38.01 (3.53)
ACD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.20 (1.60)	29" (737)	31" (787)	79 1/8" (2029)	17.79 (1.65)	17.20 (1.60)	38.01 (3.53)
ACD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	40.01 (3.72)	68 3/16" (1732)	72 1/8" (1832)	79 1/8" (2029)	21.20 (1.97)	40.01 (3.72)	42.57 (3.95)
ACD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2180)	19.41 (1.80)	33" (838)	35" (889)	79 1/8" (2029)	21.20 (1.97)	19.41 (1.80)	42.57 (3.95)
ACD4070	2	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	27.80 (2.58)	44 3/16" (1122)	48 1/8" (1222)	83 3/16" (2113)	13.13 (1.22)	27.80 (2.58)	30.07 (2.79)
ACD4070	1	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	13.29 (1.23)	21" (533)	23" (584)	83 3/16" (2113)	13.13 (1.22)	13.29 (1.23)	30.07 (2.79)
ACD5070	2	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	34.73 (3.23)	56 3/16" (1427)	60 1/8" (1527)	83 3/16" (2113)	16.95 (1.57)	34.73 (3.23)	37.18 (3.45)
ACD5070	1	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	16.75 (1.56)	27" (686)	29" (737)	83 3/16" (2113)	16.95 (1.57)	16.75 (1.56)	37.18 (3.45)
ACD5470	2	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	37.04 (3.44)	60 3/16" (1529)	64 1/8" (1629)	83 3/16" (2113)	18.75 (1.74)	37.04 (3.44)	39.55 (3.67)
ACD5470	1	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	17.91 (1.66)	29" (737)	31" (787)	83 3/16" (2113)	18.75 (1.74)	17.91 (1.66)	39.55 (3.67)
ACD6070	2	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2180)	41.67 (3.87)	68 3/16" (1732)	72 1/8" (1832)	83 3/16" (2113)	22.34 (2.08)	41.67 (3.87)	44.29 (4.11)
ACD6070	1	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2426)	20.22 (1.88)	33" (838)	35" (889)	83 3/16" (2113)	22.34 (2.08)	20.22 (1.88)	44.29 (4.11)
ACD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	31.04 (2.88)	44 3/16" (1122)	48 1/8" (1222)	92 1/8" (2359)	15.10 (1.40)	31.04 (2.88)	33.48 (3.11)
ACD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.83 (1.38)	21" (533)	23" (584)	92 1/8" (2359)	15.10 (1.40)	14.83 (1.38)	33.48 (3.11)
ACD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.78 (3.60)	56 3/16" (1427)	60 1/8" (1527)	92 1/8" (2359)	19.49 (1.81)	38.78 (3.60)	41.40 (3.85)
ACD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.70 (1.74)	27" (686)	29" (737)	92 1/8" (2359)	19.49 (1.81)	18.70 (1.74)	41.40 (3.85)
ACD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.36 (3.84)	60 3/16" (1529)	64 1/8" (1629)	92 1/8" (2359)	21.56 (2.00)	41.36 (3.84)	44.04 (4.09)
ACD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.99 (1.86)	29" (737)	31" (787)	92 1/8" (2359)	21.56 (2.00)	19.99 (1.86)	44.04 (4.09)
ACD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.52 (4.32)	68 3/16" (1732)	72 1/8" (1832)	92 1/8" (2359)	25.69 (2.39)	46.52 (4.32)	49.31 (4.58)
ACD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.57 (2.10)	33" (838)	35" (889)	92 1/8" (2359)	25.69 (2.39)	22.57 (2.10)	49.31 (4.58)

• "Door Dimension" always refers to outside frame to frame dimension.
 • "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 • Dimensions in parentheses are in millimeters or square meters.
 *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
ACSLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
ACSLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
ACSLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
ACSLD0870	9 15/16" (252)	85 5/16" (2167)	10 7/16" (265)	85 13/16" (2180)	3.93 (0.37)	5.89 (0.55)
ACSLD1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	7.32 (0.68)	9.44 (0.88)
ACSLD2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	12.84 (1.19)	15.22 (1.41)
ACSLD3070	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	19.63 (1.82)	22.33 (2.07)
ACSLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
ACSLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
ACSLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
ACSLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

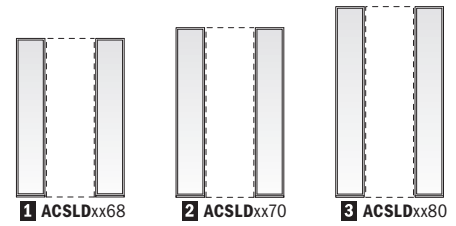


Direct-set (ACSLD) commercial outswing entry door sidelights.

Sash-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLO1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	3.41 (0.32)	9.08 (0.84)
ACSLO2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	7.56 (0.70)	14.63 (1.36)
ACSLO2668	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	8.79 (0.82)	18.04 (1.68)
ACSLO2868	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	9.21 (0.86)	19.18 (1.78)
ACSLO1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	3.59 (0.33)	9.44 (0.88)
ACSLO2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	7.97 (0.74)	15.22 (1.41)
ACSLO2670	31 11/16" (805)	85 5/16" (2167)	32 3/16" (818)	85 13/16" (2180)	9.26 (0.86)	18.77 (1.74)
ACSLO2870	33 11/16" (856)	85 5/16" (2167)	34 3/16" (868)	85 13/16" (2180)	9.71 (0.90)	19.96 (1.85)
ACSLO1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	4.13 (0.38)	10.51 (0.98)
ACSLO2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	9.16 (0.85)	16.95 (1.57)
ACSLO2680	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	10.65 (0.99)	20.9 (1.94)
ACSLO2880	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	11.17 (1.04)	22.22 (2.06)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

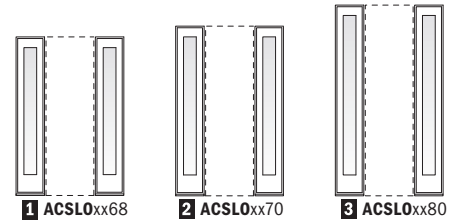

Sash-set (ACSLO) commercial outswing entry door sidelights.