

100 SERIES DOUBLE-HUNG WINDOWS



Available at select locations in Alabama, Connecticut, Delaware, District of Columbia, Florida, Georgia, Illinois, Indiana, Iowa, Kansas, Kentucky, Massachusetts, Maine, Maryland, Michigan, Minnesota, Mississippi, Missouri, Nebraska, New Hampshire, New Jersey, New York, North Carolina, North Dakota, Ohio, Pennsylvania, Rhode Island, South Carolina, South Dakota, Tennessee, Vermont, Virginia, West Virginia and Wisconsin.

Opening and Area Specifications for Double-Hung Windows

Window Number	Clear Opening Area Sq. Ft./ (m ²)	Clear Opening in Full Open Position		Glass Area Sq. Ft./ (m ²)	Vent Area Sq. Ft./ (m ²)	Top of Subfloor to Top of Inside Sill Stop Inches/ (mm)	Overall Window Area Sq. Ft./ (m ²)
		Width Inches/ (mm)	Height Inches/ (mm)				
1620	0.78 (0.07)	14" (356)	8 1/16" (204)	1.18 (0.11)	0.81 (0.08)	60 1/2" (1537)	2.86 (0.27)
1626	1.07 (0.10)	14" (356)	11 1/16" (280)	1.65 (0.15)	1.10 (0.10)	54 1/2" (1384)	3.59 (0.33)
1630	1.36 (0.13)	14" (356)	14 1/16" (357)	2.12 (0.20)	1.39 (0.13)	48 1/2" (1232)	4.31 (0.40)
1636	1.65 (0.15)	14" (356)	17 1/16" (433)	2.59 (0.24)	1.68 (0.16)	42 1/2" (1080)	5.04 (0.47)
1640	1.94 (0.18)	14" (356)	20 1/16" (509)	3.05 (0.28)	1.98 (0.18)	36 1/2" (927)	5.77 (0.54)
1646	2.24 (0.21)	14" (356)	23 1/16" (585)	3.52 (0.33)	2.27 (0.21)	30 1/2" (775)	6.50 (0.60)
1650	2.53 (0.23)	14" (356)	26 1/16" (661)	3.99 (0.37)	2.56 (0.24)	24 1/2" (622)	7.23 (0.67)
1656	2.82 (0.26)	14" (356)	29 1/16" (738)	4.46 (0.41)	2.85 (0.27)	18 1/2" (470)	7.96 (0.74)
1660	3.11 (0.29)	14" (356)	32 1/16" (814)	4.93 (0.46)	3.15 (0.29)	12 1/2" (318)	8.69 (0.81)
1666	3.41 (0.32)	14" (356)	35 1/16" (890)	5.40 (0.50)	3.44 (0.32)	6 1/2" (165)	9.42 (0.88)
1670	3.70 (0.34)	14" (356)	38 1/16" (967)	6.64 (0.62)	3.73 (0.35)	14" (356)	10.50 (0.98)
1676	3.99 (0.37)	14" (356)	41 1/16" (1043)	7.15 (0.66)	4.02 (0.37)	8" (203)	11.25 (1.05)
2020	1.11 (0.10)	20" (508)	8 1/16" (204)	1.81 (0.17)	1.15 (0.11)	60 1/2" (1537)	3.84 (0.36)
2026	1.52 (0.14)	20" (508)	11 1/16" (280)	2.53 (0.23)	1.57 (0.15)	54 1/2" (1384)	4.81 (0.45)
2030	1.94 (0.18)	20" (508)	14 1/16" (357)	3.25 (0.30)	1.99 (0.18)	48 1/2" (1232)	5.79 (0.54)
2036	2.36 (0.22)	20" (508)	17 1/16" (433)	3.96 (0.37)	2.40 (0.22)	42 1/2" (1080)	6.77 (0.63)
2040	2.78 (0.26)	20" (508)	20 1/16" (509)	4.68 (0.44)	2.82 (0.26)	36 1/2" (927)	7.75 (0.72)
2046	3.19 (0.30)	20" (508)	23 1/16" (585)	5.40 (0.50)	3.24 (0.30)	30 1/2" (775)	8.73 (0.81)
2050	3.61 (0.34)	20" (508)	26 1/16" (661)	6.12 (0.57)	3.66 (0.34)	24 1/2" (622)	9.71 (0.90)
2056	4.03 (0.37)	20" (508)	29 1/16" (738)	6.84 (0.64)	4.07 (0.38)	18 1/2" (470)	10.69 (0.99)
2060	4.45 (0.41)	20" (508)	32 1/16" (814)	7.56 (0.70)	4.49 (0.42)	12 1/2" (318)	11.67 (1.08)
2066	4.86 (0.45)	20" (508)	35 1/16" (890)	8.28 (0.77)	4.91 (0.46)	6 1/2" (165)	12.65 (1.18)
2070	5.28 (0.49)	20" (508)	38 1/16" (967)	9.86 (0.92)	5.33 (0.50)	14" (356)	14.00 (1.30)
2076♦	5.70 (0.53)	20" (508)	41 1/16" (1043)	10.62 (0.99)	5.74 (0.53)	8" (203)	15.00 (1.39)
2620	1.44 (0.13)	26" (660)	8 1/16" (204)	2.44 (0.23)	1.50 (0.14)	60 1/2" (1537)	4.81 (0.45)
2626	1.98 (0.18)	26" (660)	11 1/16" (280)	3.41 (0.32)	2.04 (0.19)	54 1/2" (1384)	6.04 (0.56)
2630	2.52 (0.23)	26" (660)	14 1/16" (357)	4.37 (0.41)	2.58 (0.24)	48 1/2" (1232)	7.27 (0.68)
2636	3.07 (0.28)	26" (660)	17 1/16" (433)	5.34 (0.50)	3.13 (0.29)	42 1/2" (1080)	8.50 (0.79)
2640	3.61 (0.34)	26" (660)	20 1/16" (509)	6.31 (0.59)	3.67 (0.34)	36 1/2" (927)	9.73 (0.90)
2646	4.15 (0.39)	26" (660)	23 1/16" (585)	7.28 (0.68)	4.21 (0.39)	30 1/2" (775)	10.96 (1.02)
2650	4.69 (0.44)	26" (660)	26 1/16" (661)	8.25 (0.77)	4.75 (0.44)	24 1/2" (622)	12.19 (1.13)
2656	5.23 (0.49)	26" (660)	29 1/16" (738)	9.22 (0.86)	5.29 (0.49)	18 1/2" (470)	13.42 (1.25)
2660♦	5.78 (0.54)	26" (660)	32 1/16" (814)	10.19 (0.95)	5.84 (0.54)	12 1/2" (318)	14.65 (1.36)
2666♦	6.32 (0.59)	26" (660)	35 1/16" (890)	11.16 (1.04)	6.38 (0.59)	6 1/2" (165)	15.88 (1.48)
2670♦	6.86 (0.64)	26" (660)	38 1/16" (967)	13.08 (1.22)	6.92 (0.64)	14" (356)	17.50 (1.63)
2676♦	7.40 (0.69)	26" (660)	41 1/16" (1043)	14.09 (1.31)	7.76 (0.72)	8" (203)	18.75 (1.74)
3020	1.77 (0.16)	32" (813)	8 1/16" (204)	3.07 (0.28)	1.84 (0.17)	60 1/2" (1537)	5.79 (0.54)
3026	2.44 (0.23)	32" (813)	11 1/16" (280)	4.28 (0.40)	2.51 (0.23)	54 1/2" (1384)	7.27 (0.68)
3030	3.11 (0.29)	32" (813)	14 1/16" (357)	5.50 (0.51)	3.18 (0.30)	48 1/2" (1232)	8.75 (0.81)
3036	3.77 (0.35)	32" (813)	17 1/16" (433)	6.72 (0.62)	3.85 (0.36)	42 1/2" (1080)	10.23 (0.95)
3040	4.44 (0.41)	32" (813)	20 1/16" (509)	7.94 (0.74)	4.51 (0.42)	36 1/2" (927)	11.71 (1.09)
3046	5.11 (0.47)	32" (813)	23 1/16" (585)	9.16 (0.85)	5.18 (0.48)	30 1/2" (775)	13.19 (1.23)
3050♦	5.77 (0.54)	32" (813)	26 1/16" (661)	10.38 (0.96)	5.85 (0.54)	24 1/2" (622)	14.67 (1.36)
3056♦	6.44 (0.60)	32" (813)	29 1/16" (738)	11.60 (1.08)	6.51 (0.61)	18 1/2" (470)	16.15 (1.50)
3060♦	7.11 (0.66)	32" (813)	32 1/16" (814)	12.82 (1.19)	7.18 (0.67)	12 1/2" (318)	17.63 (1.64)
3066♦	7.78 (0.72)	32" (813)	35 1/16" (890)	14.03 (1.30)	7.85 (0.73)	6 1/2" (165)	19.11 (1.78)
3070♦	8.44 (0.78)	32" (813)	38 1/16" (967)	15.25 (1.40)	8.52 (0.79)	14" (356)	21.00 (1.95)
3076♦	9.11 (0.85)	32" (813)	41 1/16" (1043)	16.47 (1.50)	9.19 (0.85)	8" (203)	22.50 (2.09)
3620	2.10 (0.20)	38" (965)	8 1/16" (204)	3.69 (0.34)	2.19 (0.20)	60 1/2" (1537)	6.77 (0.63)
3626	2.89 (0.27)	38" (965)	11 1/16" (280)	5.16 (0.48)	2.98 (0.28)	54 1/2" (1384)	8.50 (0.79)
3630	3.69 (0.34)	38" (965)	14 1/16" (357)	6.63 (0.62)	3.77 (0.35)	48 1/2" (1232)	10.23 (0.95)
3636	4.48 (0.42)	38" (965)	17 1/16" (433)	8.10 (0.75)	4.57 (0.42)	42 1/2" (1080)	11.96 (1.11)
3640	5.27 (0.49)	38" (965)	20 1/16" (509)	9.57 (0.89)	5.36 (0.50)	36 1/2" (927)	13.69 (1.27)
3646	6.06 (0.56)	38" (965)	23 1/16" (585)	11.04 (1.03)	6.15 (0.57)	30 1/2" (775)	15.42 (1.43)
3650♦	6.86 (0.64)	38" (965)	26 1/16" (661)	12.51 (1.16)	6.94 (0.64)	24 1/2" (622)	17.15 (1.59)
3656♦	7.65 (0.71)	38" (965)	29 1/16" (738)	13.98 (1.30)	7.73 (0.72)	18 1/2" (470)	18.88 (1.75)
3660♦	8.44 (0.78)	38" (965)	32 1/16" (814)	15.44 (1.43)	8.53 (0.79)	12 1/2" (318)	20.61 (1.91)
3666♦♦	9.23 (0.86)	38" (965)	35 1/16" (890)	16.91 (1.57)	9.32 (0.87)	6 1/2" (165)	22.34 (2.08)
4020	2.43 (0.23)	44" (1118)	8 1/16" (204)	4.32 (0.40)	2.53 (0.24)	60 1/2" (1537)	7.75 (0.72)

♦ Top of Subfloor to Top of Inside Sill Stop is calculated based upon a structural header height of 6'-10 1/2" (2096) except for XX70 and XX76 heights which are calculated using a header height of 8'-0" (2438).
 • Dimensions in parentheses are in millimeters or square meters.
 • Two locks are standard for 36XX and 40XX widths or windows equal to or greater than 3'-5 1/2" (1054) wide. Two locks are optional for 20XX, 26XX and 30XX widths or windows equal to or greater than 1'-11 1/2" (597) wide and less than 3'-5 1/2" (1054) wide.
 ♦ Meets or exceeds clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).
 ♦ Windows with tempered glass may have limited sash travel.

continued on next page

100 SERIES DOUBLE-HUNG WINDOWS



Available at select locations in Alabama, Connecticut, Delaware, District of Columbia, Florida, Georgia, Illinois, Indiana, Iowa, Kansas, Kentucky, Massachusetts, Maine, Maryland, Michigan, Minnesota, Mississippi, Missouri, Nebraska, New Hampshire, New Jersey, New York, North Carolina, North Dakota, Ohio, Pennsylvania, Rhode Island, South Carolina, South Dakota, Tennessee, Vermont, Virginia, West Virginia and Wisconsin.

Opening and Area Specifications for Double-Hung Windows *(continued)*

Window Number	Clear Opening Area Sq. Ft./ (m ²)	Clear Opening in Full Open Position		Glass Area Sq. Ft./ (m ²)	Vent Area Sq. Ft./ (m ²)	Top of Subfloor to Top of Inside Sill Stop Inches/ (mm)	Overall Window Area Sq. Ft./ (m ²)
		Width Inches/ (mm)	Height Inches/ (mm)				
4026	3.35 (0.31)	44" (1118)	11 1/16" (280)	6.04 (0.56)	3.45 (0.32)	54 1/2" (1384)	9.73 (0.90)
4030	4.27 (0.40)	44" (1118)	14 1/16" (357)	7.76 (0.72)	4.37 (0.41)	48 1/2" (1232)	11.71 (1.09)
4036	5.19 (0.48)	44" (1118)	17 1/16" (433)	9.48 (0.88)	5.29 (0.49)	42 1/2" (1080)	13.69 (1.27)
4040	6.10 (0.57)	44" (1118)	20 1/16" (509)	11.20 (1.04)	6.20 (0.58)	36 1/2" (927)	15.67 (1.46)
4046	7.02 (0.65)	44" (1118)	23 1/16" (585)	12.92 (1.20)	7.12 (0.66)	30 1/2" (775)	17.65 (1.64)
4050♦	7.94 (0.74)	44" (1118)	26 1/16" (661)	14.64 (1.36)	8.04 (0.75)	24 1/2" (622)	19.63 (1.82)
4056♦♦	8.85 (0.82)	44" (1118)	29 1/16" (738)	16.35 (1.52)	8.96 (0.83)	18 1/2" (470)	21.61 (2.01)
4060♦♦	9.77 (0.91)	44" (1118)	32 1/16" (814)	18.07 (1.68)	9.87 (0.92)	12 1/2" (318)	23.59 (2.19)
4066♦♦	10.69 (0.99)	44" (1118)	35 1/16" (890)	19.79 (1.84)	10.79 (1.00)	6 1/2" (165)	25.56 (2.38)

• Top of Subfloor to Top of Inside Sill Stop is calculated based upon a structural header height of 6'-10 1/2" (2096) except for XX70 and XX76 heights which are calculated using a header height of 8'-0" (2438).

• Dimensions in parentheses are in millimeters or square meters.

• **Two locks are standard for 36XX and 40XX widths or windows equal to or greater than 3'-5 1/2" (1054) wide.** Two locks are optional for 20XX, 26XX and 30XX widths or windows equal to or greater than 1'-11 1/2" (597) wide and less than 3'-5 1/2" (1054) wide.

♦ Meets or exceeds clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

♦♦ Windows with tempered glass may have limited sash travel.


Custom Sizes and Specification Formulas



100 Series custom-size windows are available in 1/8" (3) increments between minimum and maximum widths and heights shown. Some restrictions apply.

Double-Hung Windows

Equal Sash Ratio

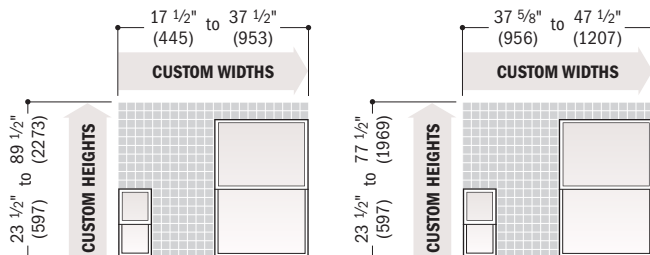

Two locks are standard for windows equal to or greater than 3'-5 1/2" (1054) wide.

Two locks are optional for windows equal to or greater than 1'-11 1/2" (597) wide and less than 3'-5 1/2" (1054).

Clear Opening* 	Width = window width - 3.470" (88) Height = (window height ÷ 2) - 3.790" (96)	Minimum R.O. 	Width = window width + 1/2" (13) Height = window height + 1/2" (13)
	Vent Opening 		Unobst. Glass
	Width = window width - 3.470" (88) Height = (window height ÷ 2) - 3.711" (94)		Width = window width - 6.250" (159) Upper Sash Height = (window height ÷ 2) - 4.205" (107) Lower Sash Height = (window height ÷ 2) - 4.205" (107) Total Sash Height = window height - 8.410" (214)

*Windows with tempered glass may have limited sash travel. Contact your Andersen supplier.