

Table of Frenchwood® Hinged Inswing Patio Door Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Door Dimension	2'-0 1/8" (612)		3'-1 1/4" (1200)		3'-11 1/4" (1200)					
Minimum Rough Opening	2'-1" (634)		4'-0" (1219)		4'-0" (1219)					
Unobstructed Glass (single panel only)	12 7/8" (327)		12 7/8" (327)		12 7/8" (327)					
3 heights										
1 FWHID	2168S		4068SS		4068APLR/4068PALR					
2 FWHID	21611S		40611SS		40611APLR/40611PALR					
3 FWHID	2180S		4080SS		4080APLR/4080PALR					
Door Dimension	2'-6 1/8" (764)	2'-6 1/8" (764)	2'-6 1/8" (764)	4'-11 1/4" (1505)	4'-11 1/4" (1505)	4'-11 1/4" (1505)	4'-11 1/4" (1505)	4'-11 1/4" (1505)	4'-11 1/4" (1505)	4'-11 1/4" (1505)
Minimum Rough Opening	2'-7" (787)	2'-7" (787)	2'-7" (787)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)
Unobstructed Glass (single panel only)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)
3 heights										
1 FWHID	2768S	2768AR	2768AL	5068SS	5068ASR	5068ASL	5068SAR	5068SAL	5068APLR/5068PALR	5068APLR/5068PALR
2 FWHID	27611S	27611AR	27611AL	50611SS	50611ASR	50611ASL	50611SAR	50611SAL	50611APLR/50611PALR	50611APLR/50611PALR
3 FWHID	2780S	2780AR	2780AL	5080SS	5080ASR	5080ASL	5080SAR	5080SAL	5080APLR/5080PALR	5080APLR/5080PALR
Door Dimension	2'-8 1/8" (815)	2'-8 1/8" (815)	2'-8 1/8" (815)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)
Minimum Rough Opening	2'-9" (838)	2'-9" (838)	2'-9" (838)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)
Unobstructed Glass (single panel only)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)
3 heights										
1 FWHID	2968S	2968AR	2968AL	5468SS	5468ASR	5468ASL	5468SAR	5468SAL	5468APLR/5468PALR	5468APLR/5468PALR
2 FWHID	29611S	29611AR	29611AL	54611SS	54611ASR	54611ASL	54611SAR	54611SAL	54611APLR/54611PALR	54611APLR/54611PALR
3 FWHID	2980S	2980AR	2980AL	5480SS	5480ASR	5480ASL	5480SAR	5480SAL	5480APLR/5480PALR	5480APLR/5480PALR
Door Dimension	3'-0 1/8" (917)	3'-0 1/8" (917)	3'-0 1/8" (917)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)
Minimum Rough Opening	3'-1" (940)	3'-1" (940)	3'-1" (940)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)
Unobstructed Glass (single panel only)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)
3 heights										
1 FWHID	3168S	3168AR	3168AL	6068SS	6068ASR	6068ASL	6068SAR	6068SAL	6068APLR/6068PALR	6068APLR/6068PALR
2 FWHID	31611S	31611AR	31611AL	60611SS	60611ASR	60611ASL	60611SAR	60611SAL	60611APLR/60611PALR	60611APLR/60611PALR
3 FWHID	3180S	3180AR	3180AL	6080SS	6080ASR	6080ASL	6080SAR	6080SAL	6080APLR/6080PALR	6080APLR/6080PALR




Custom-size doors are available in 1/8" (3) increments.

Stationary (S) doors can be used as an individual door or as a sidelight. Inswing doors are available in both 4 9/16" (116) and 6 9/16" (167) jamb depths.


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.

Three Patio Door Heights

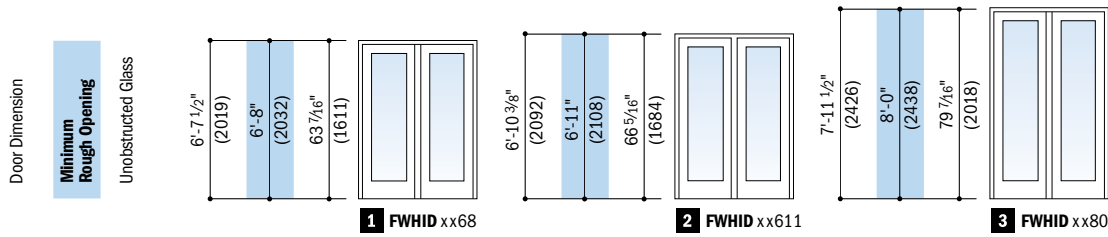


Order Designation Description

Viewed from the exterior.

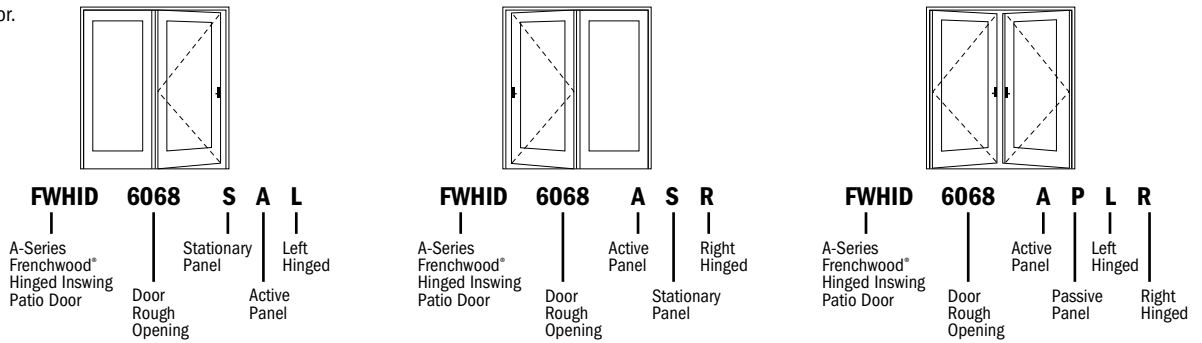

3'-2 1/8" (968)	3'-2 1/8" (968)	3'-2 1/8" (968)	6'-3 1/4" (1911)	6'-3 1/4" (1911)	6'-3 1/4" (1911)	6'-3 1/4" (1911)	6'-3 1/4" (1911)	6'-3 1/4" (1911)
3'-3" (991)	3'-3" (991)	3'-3" (991)	6'-4" (1930)	6'-4" (1930)	6'-4" (1930)	6'-4" (1930)	6'-4" (1930)	6'-4" (1930)
26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)

Notes on the previous page also apply to this page.

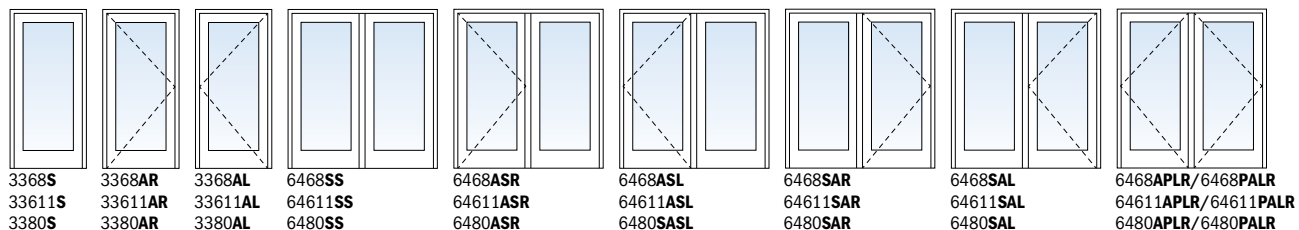


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.

Custom Sizes & Specifications



Frenchwood® Hinged Inswing and Outswing Patio Doors

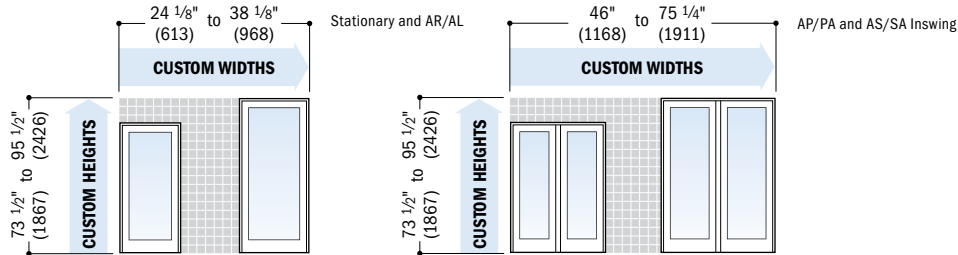

Available in 1/8" (3) increments between minimum and maximum widths and heights. Some restrictions apply, contact your Andersen supplier.

Minimum R.O.	Single Panel Inswing & Outswing	Unobstr. Glass	Single Panel Inswing & Outswing
	<p>Width = patio door width + 3/4" (19) Height = patio door height + 1/2" (13)</p>		<p>Width = patio door width - 11.22" (285) Height = patio door height - 16.06" (408)</p>
	<p>Two Panel Inswing & Outswing Width = patio door + 3/4" (19) Height = patio door + 1/2" (13)</p>		<p>Two Panel Inswing & Outswing Width = patio door width - 21.50" (546) Height = patio door height - 16.06" (408)</p>